
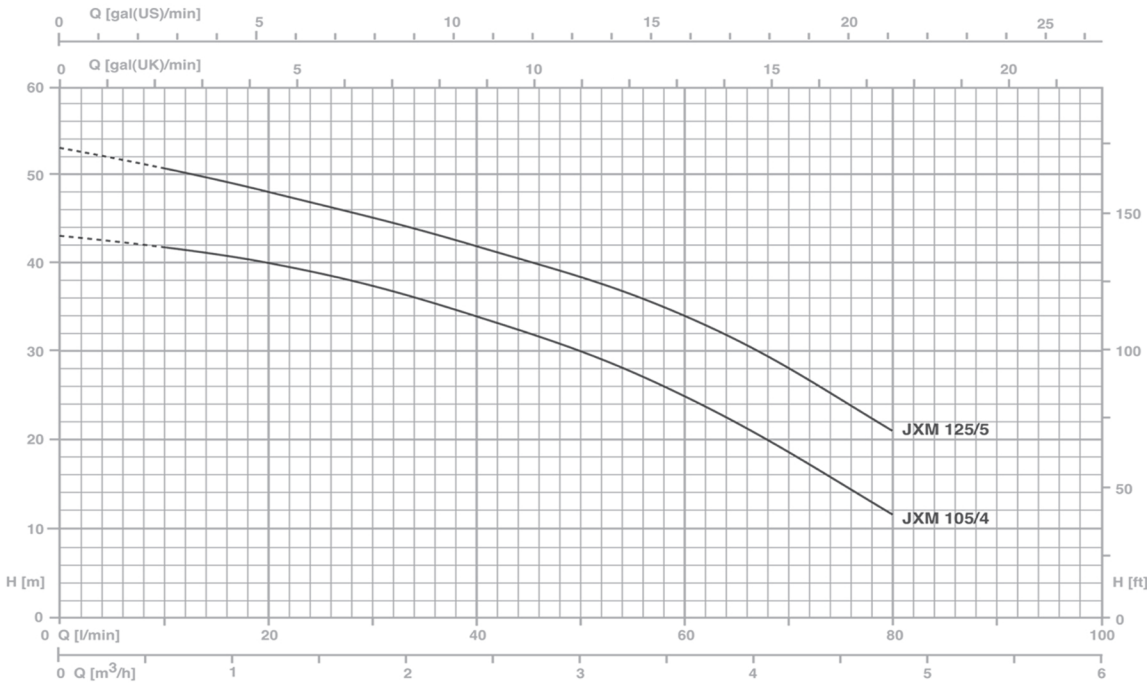



Multi-stage centrifugal pumps, horizontal and self-priming, particularly suitable for constructing small and medium sized pressurisation systems; able to suck liquids mixed with air or gas.

Product features

- Pump Body: Stainless steel AISI 304
- Motor Bracket: Aluminium
- Impeller: Noryl®
- Mechanical seal: Ceramic-Graphite
- Motor Shaft: Stainless steel AISI 416
- Liquid Temperature: 0-50°C
- Operating Pressure: 8bar MAX
- 2 Pole Induction motor: 3~230/400V-50HZ with thermal protection 1~ 230V - 50Hz
- Insulation Class: F
- Protection: IP44

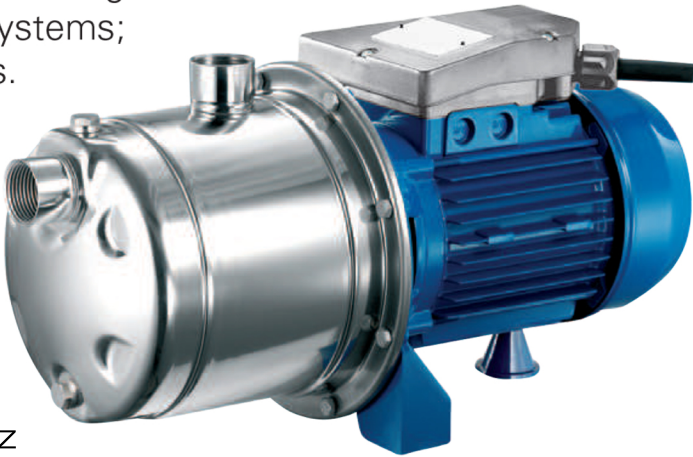

TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)									
1~	3~					1~	3~	0	0,6	1,2	2,4	3,6	4,8				
						1~	3~	0	10	20	40	60	80				
						H (m)											
JXM 105/4	JXM 105/4 T	(HP)	(kW)	1~	3~	1x230 V 50 Hz	3x400 V 50 Hz										
		1	0,74	1,07	1,1	5	1,9	43	41,5	40	34	25	12				
JXM 125/5	JXM 125/5 T	1,2	0,88	1,27	1,33	6,1	2,3	53	51	48	42	34	21				

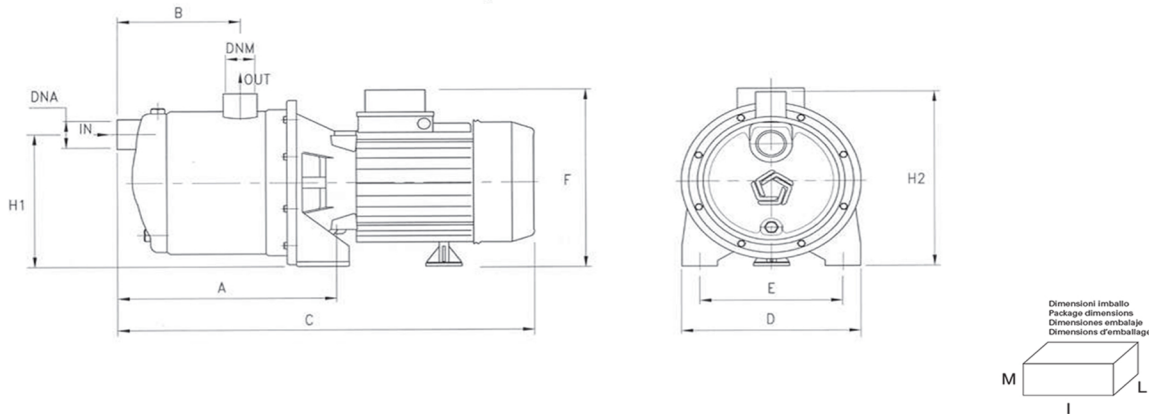

TYPE	DIMENSIONS (mm)													
	A	B	C	D	E	F	H1	H2	DNA	DNM	I	L	M	
JXM 105/4	208	128	410	175	140	215	153	210	1" G	1" G	430	210	235	11.1
JXM 125/5	208	128	410	175	140	215	153	210	1" G	1" G	430	210	235	11.7