



Pond Pump eco-X2 | eco-X2 plus

...and Nothing Else!

Energy Saving Pump of the Second Generation:
Now with Improved Input-/Output-Rate.

Fields of Application


- ✓ Waterfalls
- ✓ Brooks
- ✓ Filter Operations
- ✓ Water Circulations




Pond Pump eco-X2




✓ Energy saving:
patented impeller



✓ Dirt particles in the water
up to 8 mm grain size

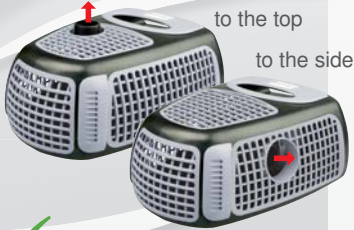

✓ Pressure connection
can be rotated by 90°

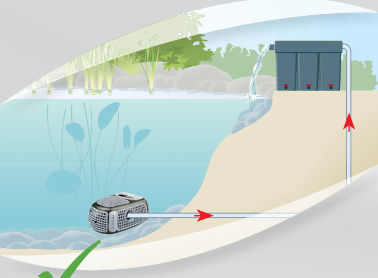

✓ Optimal for filter
operation




Ergonomic
handle

Assembly
clips



Assembly
clips

Filter housing with large
suction-surfaces for long
maintenance intervals




Removable rotor
assembly with ceramic bearings
guarantee continuous
operation



10 m cable H07

Hydraulically optimized
pump-housing




Stainless steel splitting
tube rotor





Thermal overload
protection switch

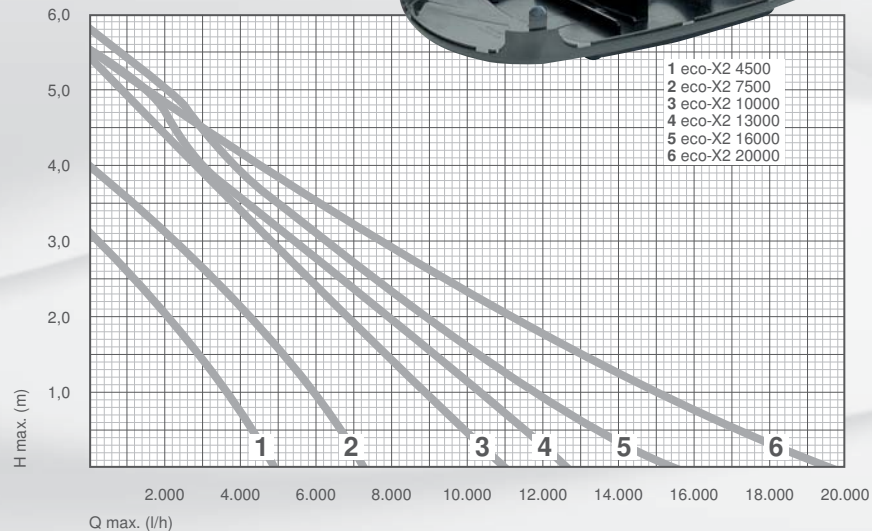Removable pre-filter
cap, no tools required



For further information and technical data please visit our website at www.messner-moves-water.com



	eco-X2 4500	eco-X2 7500	eco-X2 10000	eco-X2 13000	eco-X2 16000	eco-X2 20000
	82 l/min 4.900 l/h	122 l/min 7.300 l/h	183 l/min 11.000 l/h	210 l/min 12.600 l/h	257 l/min 15.400 l/h	327 l/min 19.600 l/h
	3,10 m	4,00 m	5,40 m	5,50 m	5,80 m	5,50 m
	48 W	75 W	110 W	140 W	190 W	205 W
	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz
	360 x 270 x 180	360 x 270 x 180	360 x 270 x 180	360 x 270 x 180	360 x 270 x 180	360 x 270 x 180
	G 1¼" - E	G 1¼" - E	G 1½" - E	G 1½" - E	G 1½" - E	G 2" - E
	G 1¼" - E	G 1¼" - E	G 1½" - E	G 1½" - E	G 1½" - E	G 2" - E
	Ø 32/40	Ø 32/40	Ø 40/50	Ø 40/50	Ø 40/50	Ø 50/63
Art.-No.	156 / 005000	156 / 005001	156 / 005002	156 / 005003	156 / 005004	156 / 005005



* not including rotor unit (part subject to wear)



Scope of delivery

eco-X2 4500
eco-X2 7500



eco-X2 10000
eco-X2 13000
eco-X2 16000



eco-X2 20000



eco-X2 4500
eco-X2 7500
eco-X2 10000
eco-X2 13000
eco-X2 16000
eco-X2 20000




Messner
moves water...


Pond Pump eco-X2 plus




✓ More circulation-power:
energy saving impeller




✓ Dirt particles in the water
up to 8 mm grain size

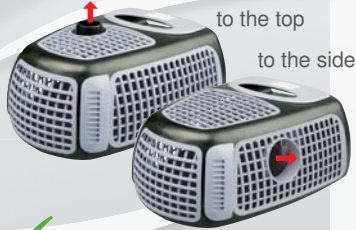

✓ Pressure connection
can be rotated by 90°

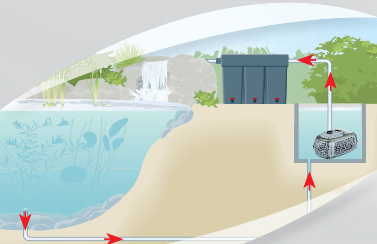

✓ Optimal for filter
operation




Ergonomic
handle

Assembly
clips




Assembly
clips

Filter housing with
large suction-surfaces
for long maintenance
intervals



Removable rotor
assembly with
ceramic bearings
guarantee continuous
operation

Hydraulically optimized
pump-housing




Stainless steel splitting
tube rotor



10 m cable H07

Thermal overload
protection switch

Removable pre-filter
cap, no tools required

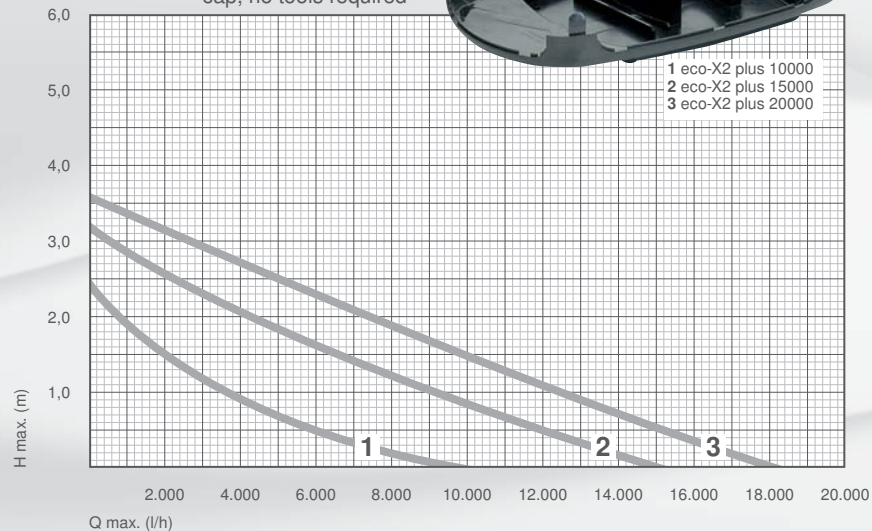



**eco-X2 plus
10000**

**eco-X2 plus
15000**

**eco-X2 plus
20000**

Accessories

eco-X2 4500 - 20000 | eco-X2 plus 10000 - 20000



165 l/min
9.900 l/h

245 l/min
14.700 l/h

300 l/min
18.000 l/h



2,40 m

3,20 m

3,60 m



60 W

105 W

155 W



230 V / 50 Hz

230 V / 50 Hz

230 V / 50 Hz



360 x 270 x 180

360 x 270 x 180

360 x 270 x 180



G 1 1/2" - E

G 2" - E

G 2" - E



G 1 1/2" - E

G 2" - E

G 2" - E



Ø 40/50

Ø 50/63

Ø 50/63

Art.-No.

156 / 005006

156 / 005007

156 / 005008

Speed Governor DS 350

Art.-No. 168 / 002974

For fine tuning of flow rate
for filter operation.



Cleaner for Pumps

Art.-No. 168 / 009115
1 liter

For cleaning of pumps, fittings
and underwater lighting.
100% biodegradable.



* not including rotor unit (part subject to wear)



Scope of delivery

eco-X2 plus 10000



eco-X2 plus 15000
eco-X2 plus 20000



eco-X2 plus 10000
eco-X2 plus 15000
eco-X2 plus 20000

